



supporting your precision

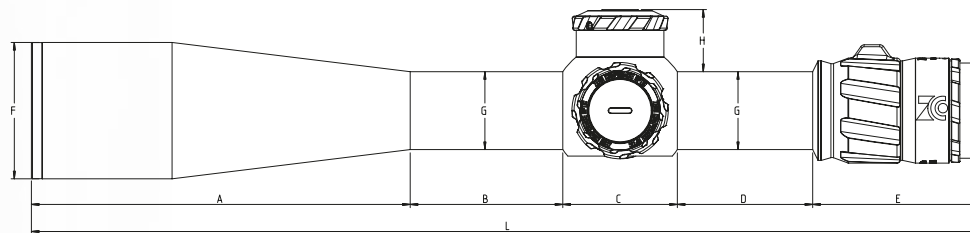

ZC840 0.125MOA DATASHEET

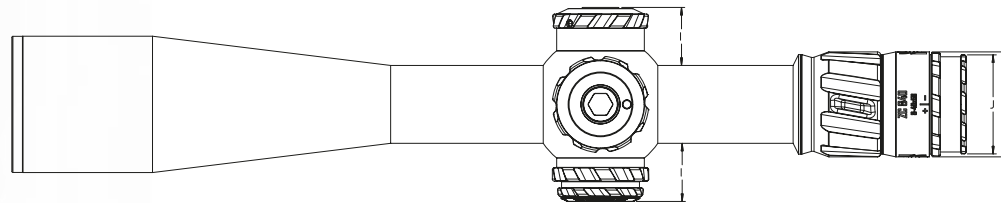

Abmaß	A	B	C	D	E	F	G	H	I	J	K	L
[mm]	175	70,5	53	62,5	80	63	36	28,7	27	45,75	48,5	441
[inch]	6.89	2.78	2.09	2.46	3.15	2.48	1.42	1.13	1.06	1.8	1.9	17.36

Magnification	8-40
Objective diameter (mm)	56
Exit pupil (mm)	7-1,4
Field of view max. / min. (m/100m)	4,6-1
Field of view (ft/100Yds.)	13,8'-3'
Parallax adjustment (m)	10-infinity
Eye relief (mm)	>90 mm
Lighttransmission (%)	92%
Reticle image plane	1.
Diopter adjustment (Dpt.)	-3 / 2
Main tube diameter (mm)	36 mm
Length (mm)	440 mm
Weight (g)	1175g
Elevation adjustment MOA /100m	57 (85)
Windage adjustment MOA /100m	18 (41)
Click value MOA /100m	0.125
Turret rotation	CCW
Filter thread Objective (mm)	M60x0.75
Impermeability	4 m water depth
Temperature Function (C°)	-25°/60°
Illuminated color	Red / Green
Locking Elevation / Windage	Elevation & Windage
AIM- automatic illumination management	Yes (after 2 mins or depending on position/directionality; after 2 hours complete shutdown)
Power supply	CR2032

www.zcompoptic.com

2023 © Zero Compromise Optic GmbH | All rights reserved. No guarantee for correctness and accuracy of the information contained.

Headquarter

Bäckerstraße 1
2433 Margarethen am Moos, Austria
+43 2230 20270-134
sales-international@zcompoptic.com

North America

9190 Lower Fords Creek Rd
Orofino, ID 83544
(208)-435-4000
sales@zcompoptic.com