



supporting your precision

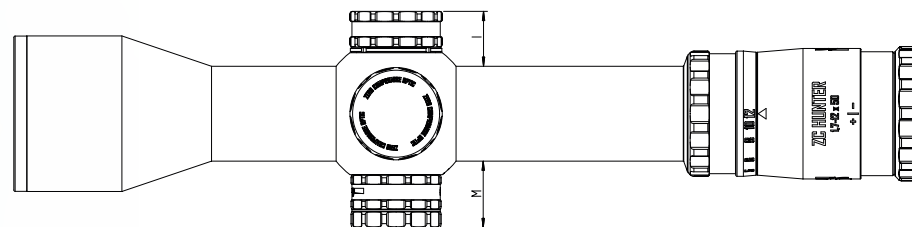

ZC HUNTER DATASHEET

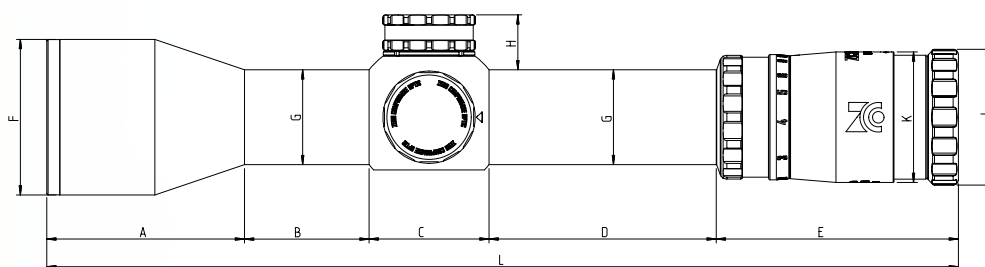

Abmaß	A	B	C	D	E	F	G	H	I	J	K	L
[mm]	75	47	45,5	86	92	59	36	21	21	51,5	49,5	346
[inch]	2.95	1.85	1.79	3.39	6.62	2.33	1.42	0.83	0.83	2.03	1.95	13.62

Magnification	1,7-12
Objective diameter (mm)	50
Exit pupil (mm)	10,5-4,2
Field of view max. / min. (m/100m)	23-3,4
Field of view (ft/100Yds.)	69'-10,2
Eye relief (mm)	>93 mm
Lighttransmission (%)	90%
Reticle image plane	1./2.
Diopter adjustment (Dpt.)	-3 / 2
Main tube diameter (mm)	36 mm
Length (mm)	346 mm
Weight (g)	850g
Elevation adjustment (cm/100m)	200
Windage adjustment (cm/100m)	200
Click value (cm/100m)	1
Turret rotation	CW
Filter thread Objective (mm)	M54x0.75
Impermeability	4m Wassertiefe
Temperature Function (C°)	-25°/55°
Illuminated color	Rot / Grün*
Locking Elevation / Windage	Höhe & Seite
AIM- automatic illumination management	Ja (nach 2min. bzw. je nach Position/ Winkellage, nach 2Std. komplette Abschaltung)
Power supply	CR2032

*Green is not available in combination with „4A-ID“ reticle

www.zcompoptic.com

2023 © Zero Compromise Optic GmbH | All rights reserved. No guarantee for correctness and accuracy of the information contained.

Headquater

Bäckerstraße 1
2433 Margarethen am Moos, Austria
+43 2230 20270-134
sales-international@zcompoptic.com

North America

9190 Lower Fords Creek Rd
Orofino, ID 83544
(208)-435-4000
sales@zcompoptic.com