




ZC420 HUNTER DATASHEET

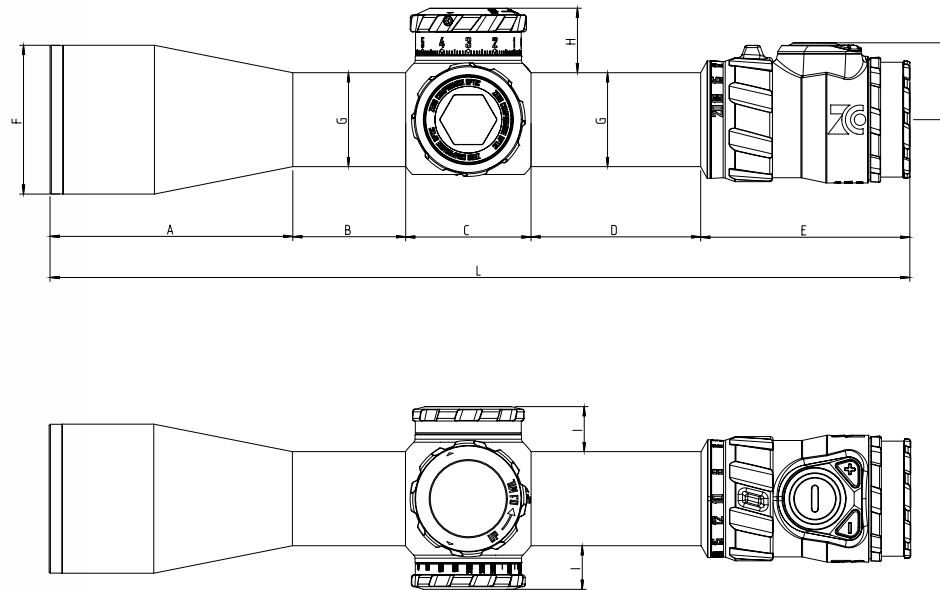

Abmaß	A	B	C	D	E	F	G	H	I	J	K	L
[mm]	93	43	48	65	80	57	36	24,7	17	45,75	29,5	32
[inch]	3.66	1.69	1.88	2.55	3.14	2.24	1.42	0.97	0.66	1.8	1.16	12.95

Magnification	4-20
Objective diameter (mm)	50
Exit pupil (mm)	10-9-2.5
Field of view max. / min. (m/100m)	9.3'-2'
Field of view (ft/100Yds.)	28'-6'
Parallax adjustment (m)	25-infinity
Eye relief (mm)	>90 mm
Lighttransmission (%)	92%
Reticle image plane	FFP / SFP
Diopter adjustment (Dpt.)	-3 / 2
Main tube diameter (mm)	36 mm
Length (mm)	328 mm
Weight (g)	905g
Elevation adjustment MRAD/100m	26
Windage adjustment MRAD/100m	18
Click value MRAD/100m	0.1
Filter thread Objective (mm)	M54x0.75
Impermeability	4 m water depth
Temperature Function (C°)	-25°/60°
Illuminated color	Red / Green
AIM- automatic illumination managment	Yes (after 2 mins or depending on position/ directionality; after 2 hours complete shutdown)
Power supply	CR2032

www.zcompoptic.com

2023 © Zero Compromise Optic GmbH | All rights reserved. No guarantee for correctness and accuracy of the information contained.

Headquarter

Bäckerstraße 1
2433 Margarethen am Moos, Austria
+43 2230 20270-134
sales-international@zcompoptic.com

North America

9190 Lower Fords Creek Rd
Orofino, ID 83544
(208)-435-4000
sales@zcompoptic.com